

- >> Full HD 1080P Real Time, 2 Megapixel
- >> External Vari-focal Lens Adjustment
- >> IP66 Weatherproof, Operating temperature with heater -40°~+50°C
- >> 3D+2D Digital Noise Reduction
- >> Digital Wide Dynamic Range
- >> Day & Night Switch Time Control
- >> Built-in 25 Meter IR LED
- >> Power over Ethernet
- >> Video Output
- >> 2-way Audio
- >> H.264/ M-JPEG Compression
- >> Micro SD Card Backup
- >> Compatible with ONVIF standard



Technical features

Hardware

CPU:	Multimedia SoC
RAM:	256MB
Flash:	16MB
Image Sensor:	1/2.7" Mega-pixel CMOS Sensor
Sensitivity:	Color : 0.05 Lux (AGC ON) B / W : 0.01 Lux (AGC ON)
Lens Type:	Vari-focal Lens 3-10.5 mm @ F1.4
View Angle:	34.89°~106.72°(H), 19.38°~61.26°(V)
ICR:	Mechanism IR cut Filter
I/O:	1 DI / 1 DO
Video Output:	Yes
Audio:	G.711(64K) and G.726(32K,24K) audio compression
Input :	3.5mm phone jack
Output:	3.5mm phone jack
Power over Ethernet:	Yes
Power Consumption:	DC 12V Max: 2.76W(IR Off); 4.80W(IR On) PoE Max: 3.84W(IR Off); 6.72W(IR On)
Operating Temperature:	-10°C ~ 55°C, with heater -40°~+55°C
Dimensions:	83mm (Ø)x 117mm (H)
Weight:	1000g
IR LEDs:	35 units, 850nm
LEDs IR Distance:	25M

Network

Ethernet:	10/ 100 Base-T
Network Protocol:	IPv6, IPv4, HTTP, HTTPS, SNMP, QoS/DSCP, Access list, IEEE 802.1X, RTSP, TCP/ IP, UDP, SMTP, FTP, PPPoE, DHCP, DDNS, NTP, UPnP, 3GPP, SAMBA, Bonjour
Wireless (optional):	802.11b/g/n with WEP,WPA-PSK,WPA2-PSK

System


Video Resolution:	1920x1080@30fps, 1280x720@30fps, 640x480@30fps, 320x240@30fps, 176x144@30fps
Video Adjust:	Brightness, Contrast, Hue, Saturation, Sharpness, AGC, Shutter Time, Sense-Up, D-WDR, Anti Fog, Lens Distortion Correction, Flip, Mirror, Day&Night Adjustable, Red Gain and Blue Gain, Denoise
Triple Streaming:	Yes
Image Snapshot:	Yes
Full Screen Monitoring:	Yes
Privacy Mask:	Yes, 3 different areas
Compression Format:	H.264/ M-JPEG
Video bitrates Adjust:	CBR, VBR
Motion Detection:	Yes, 3 different areas
Triggered Action:	Mail, FTP, Save to SD card, DO, SAMBA
Pre/ Post Alarm:	Yes, configurable
Security:	Password protection, IP address filtering, HTTPS encrypted data transmission, 802.1X port-based authentication for network protection, QoS/DSCP
Firmware Upgrade:	HTTP mode, can be upgraded remotely
Simultaneous Connection:	Up to 10

SD Card Management

Recording Trigger:	Motion Detection, IP check, Network break down (wire only), Schedule, DI
Video Format:	AVI, JPEG
Video Playback:	Yes
Delete Files:	Yes
Mobile Support:	iOS 4.3 or above, Android 1.6 or above.

Real time FullHD video streams in harsh conditions

The real time Full High Definition IP Bullet camera FX-CFBU-2M4-O-IR25 is suitable for outdoor video monitoring solutions. Camera has Digital Noise Reduction and Digital Wide Dynamic Range features. It is available with 3 ~ 10.5mm varifocal megapixel lens which can be adjusted externally. It has built-in 25 m IR leds and Power over Ethernet.

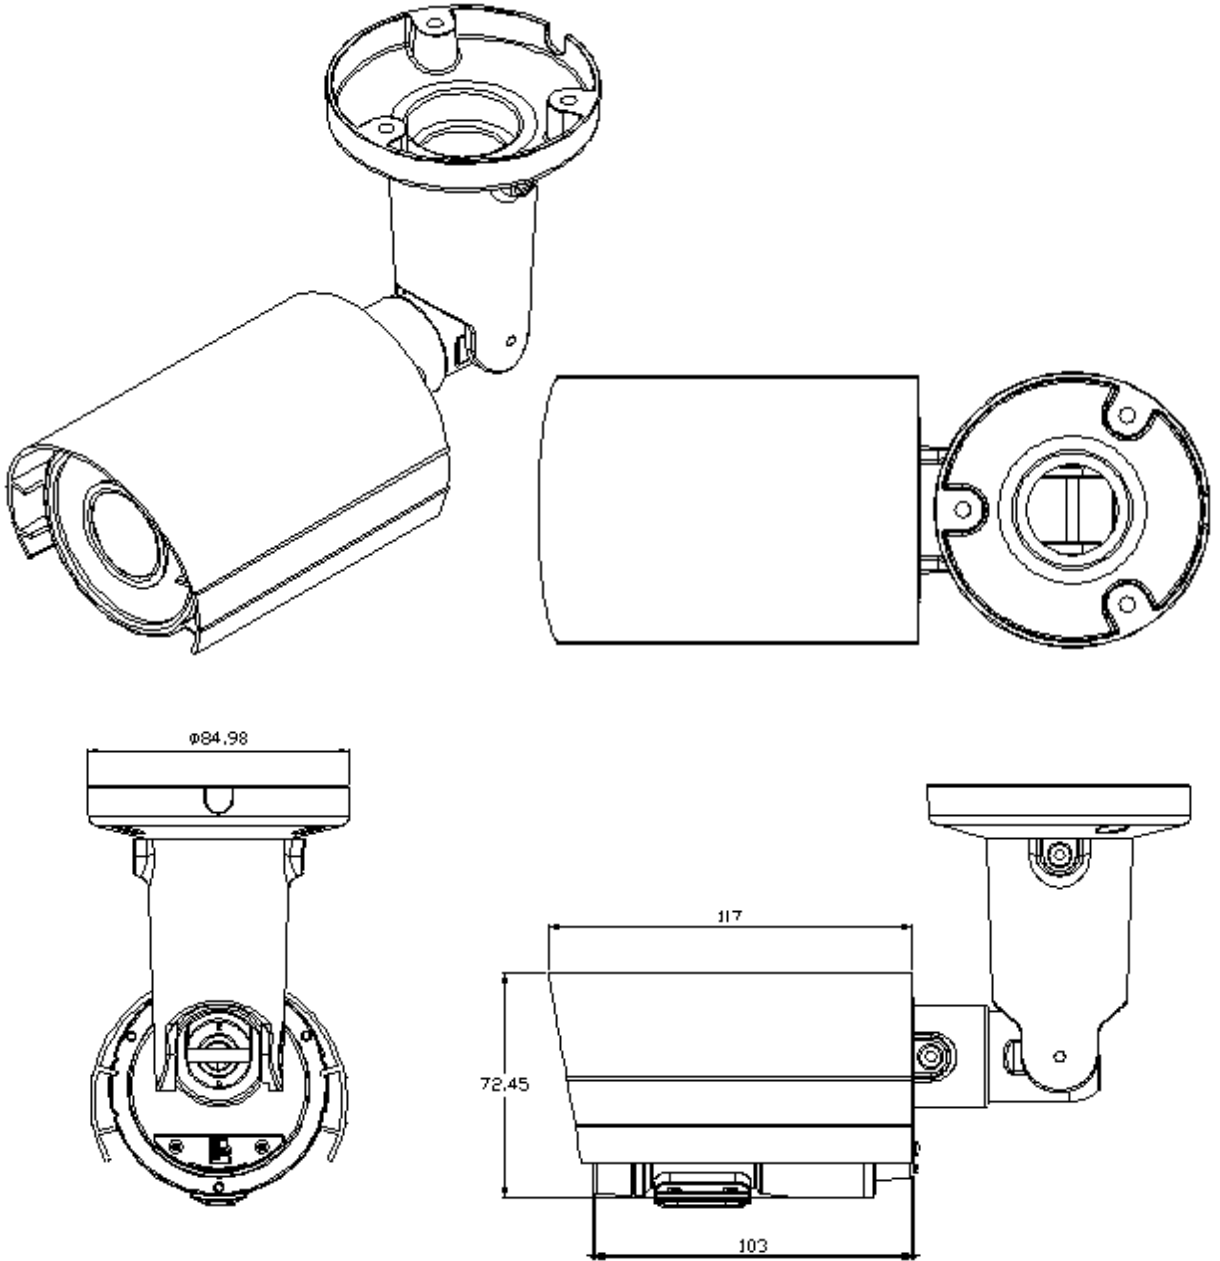

Part numbers

FX-CFBU-2M4-O-IR25

FX-CFBU-2M4-O-IR25-W

FX-CFBU-2M4-O-IR25-H

FX-CFBU-2M4-O-IR25-H-W

Varifocal lens + PoE + 25m IR leds

Varifocal lens + WLAN + 25m IR leds

Varifocal lens + PoE + 25m IR leds + Heater

Varifocal lens + WLAN + 25m IR leds + Heater