

- >> Compatible for clean waters, sumps and general applications
- >> Accurate and repeatable switching
- >> Adjustable Max and Min switching levels with the counter-weight
- >> Protection class IP68



Liquid level switch


FX-LVSW-x switches are ideal for high volume use in clean water and sump tanks. They provide accurate and repeatable switching and by regulating the distance of the adjustable counter-weight, the maximum and minimum levels can be regulated.

The float (Polypropelene) contains a micro switch assembly and is suspended with a cable. When the float tilts upwards/downwards due to a rise/decrease in fluid level it operates the micro switch.

FX-LVSW standard cable length is 5 meters. Please contact info@fidelixme.com for longer cable lengths.

Technical features

Switch capacity: 250V, 10A
Operating temperature: -10 - 60°C
Min specific gravity of liquid: 0.9
Protection Class: IP68
Float Dimensions: 80 x 142 x 42 mm
Float material: PP
Cable length: PVC, 3core, 5 meters (see order code)
Manufacturing Process: ISO9001

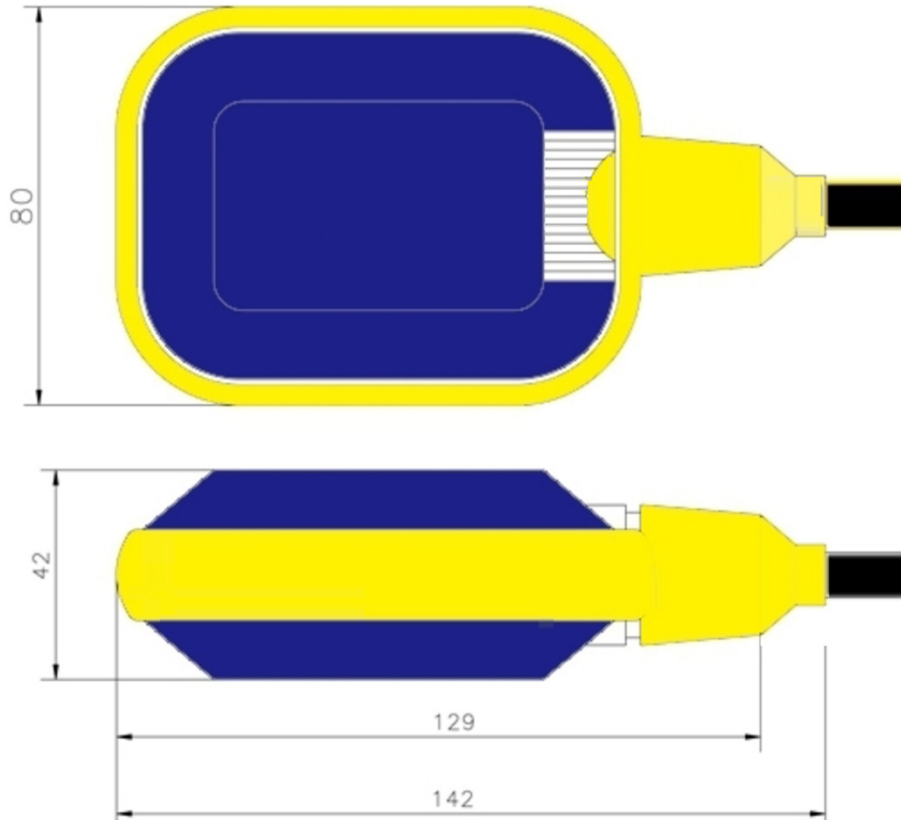

Part number

FX-LVSW-5

5 meter cable length